



Manual Operating Table - **52501 M**

Specification

Construction

Combined between iron casting and steel sheets (thickness 8mm; 5.8mm; 4.8mm; 3.8mm; 2.8mm; 1.8mm), assembled with MIG welding process and covered with stainless steel sheet (thickness 1mm).

Mattress

Made of foam and covered by imitation leather.

Position

- Hi-Lo, operated by hydraulic system.
- Trendelenburg & Reverse Trendelenburg elevation 18° to -18°, operated by crank.
- Lateral Tilt, 20° to -20°, operated by crank.

Other mattress part :

- Head raise, elevation -20° to 40°.
 - Back raise, elevation 0° to 70°.
 - Leg support, elevation 0° to 90°.
- Adjustable manually by rack system.

Kidney elevator, adjustable manually by worm gear system.

Accessories

- Post of leg support (1 pair).
- Shoulder support (1 pair).
- Lateral body support (1 pair).
- Arm rest (1 pair).
- Anesthetic screen frame (1 set).

All accessories made of combined between stainless steel and aluminum casting and covered with foam & imitation leather.

Castor

Four 3" castors (no swivel).

Painting

Epoxy powder coating finish.


Dimension

(L)1950 x (W)780 (500 on mattress) x (H)780-980 mm.


Max. Load

200 kg.

Specification subject to change without prior notice



Dimension (mm) :

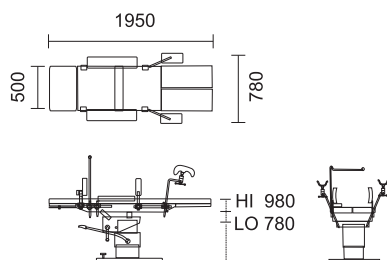

* The number in our previous catalogue is 525 MP

MANUAL OPERATING TABLE - 52501M*

Certified By TÜV : ✓ ISO 13485:2003 ✓ ISO 9001:2000 ✓ ISO 14001:2004 ✓ OHSAS 18001:2007